



日新小学校敷地の調査工事

調査地点平面図 S: 1/600

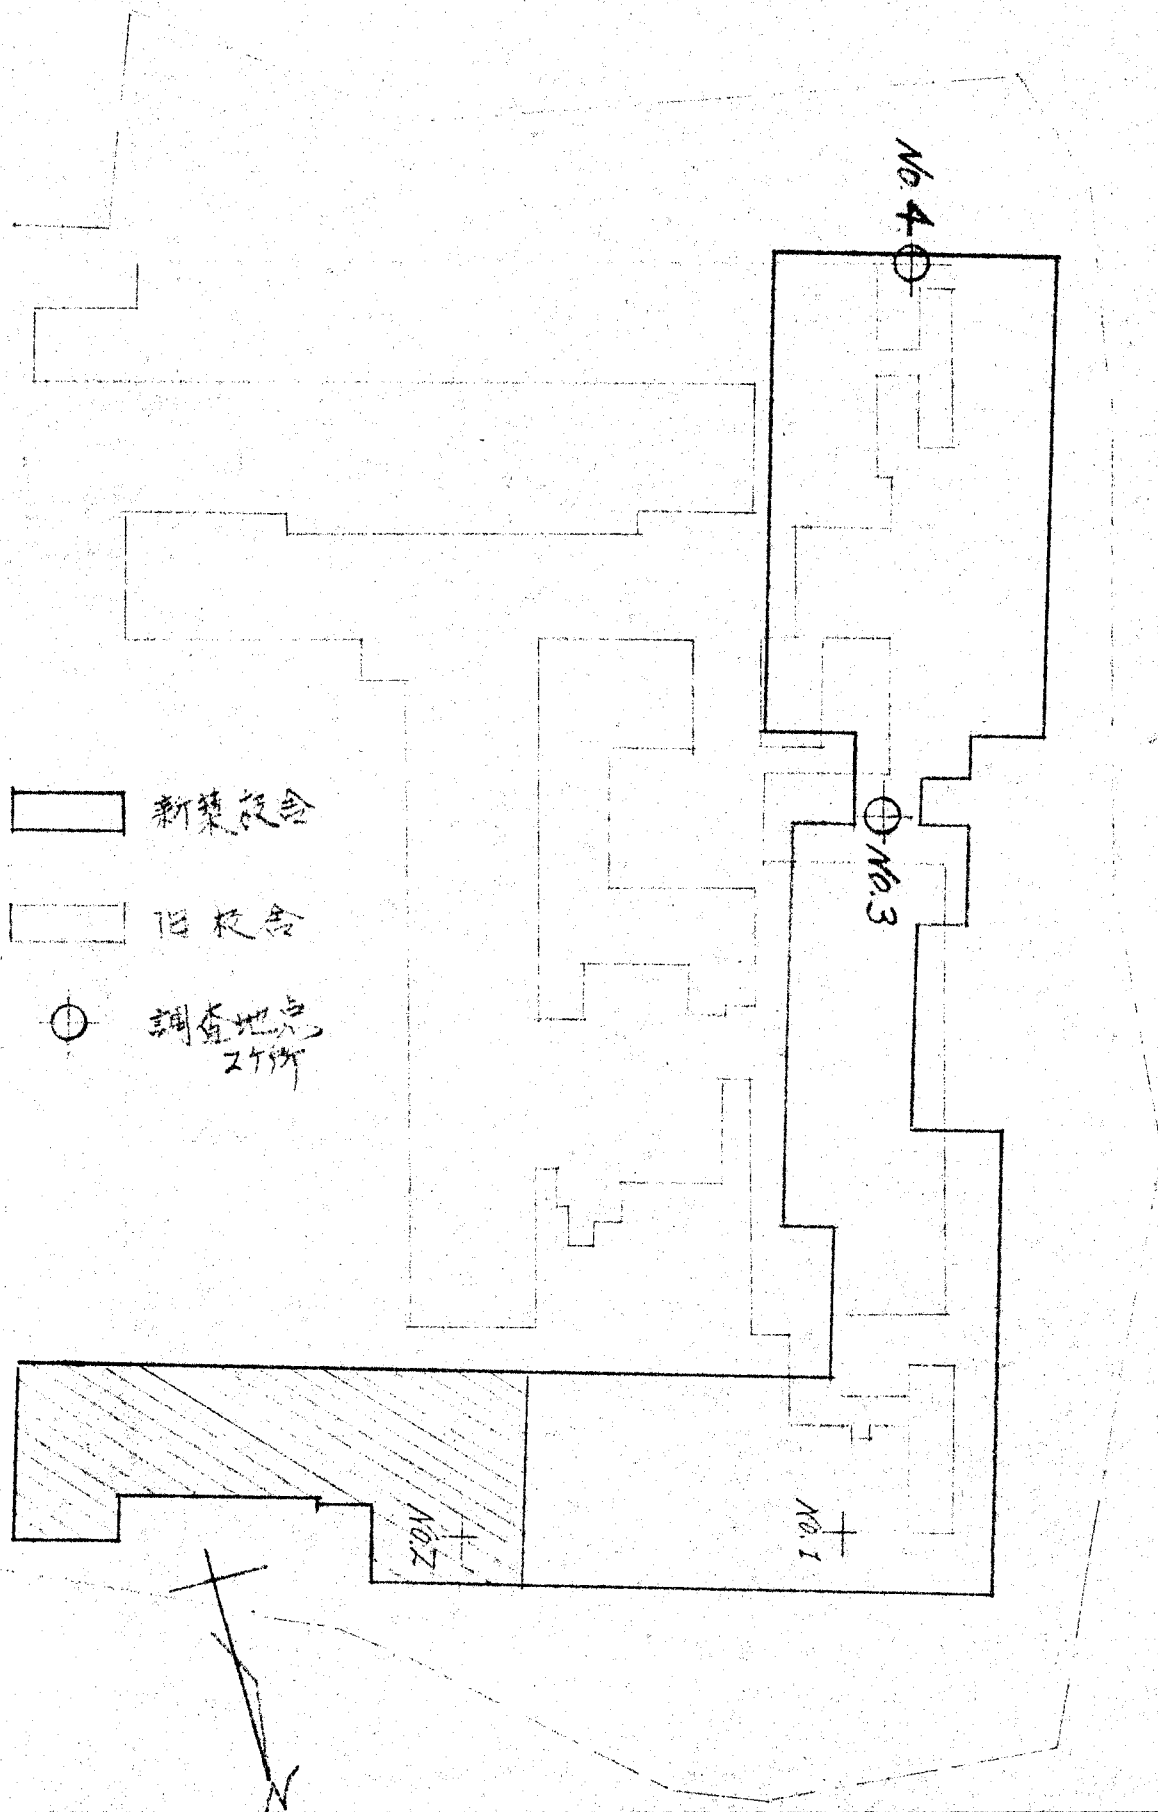

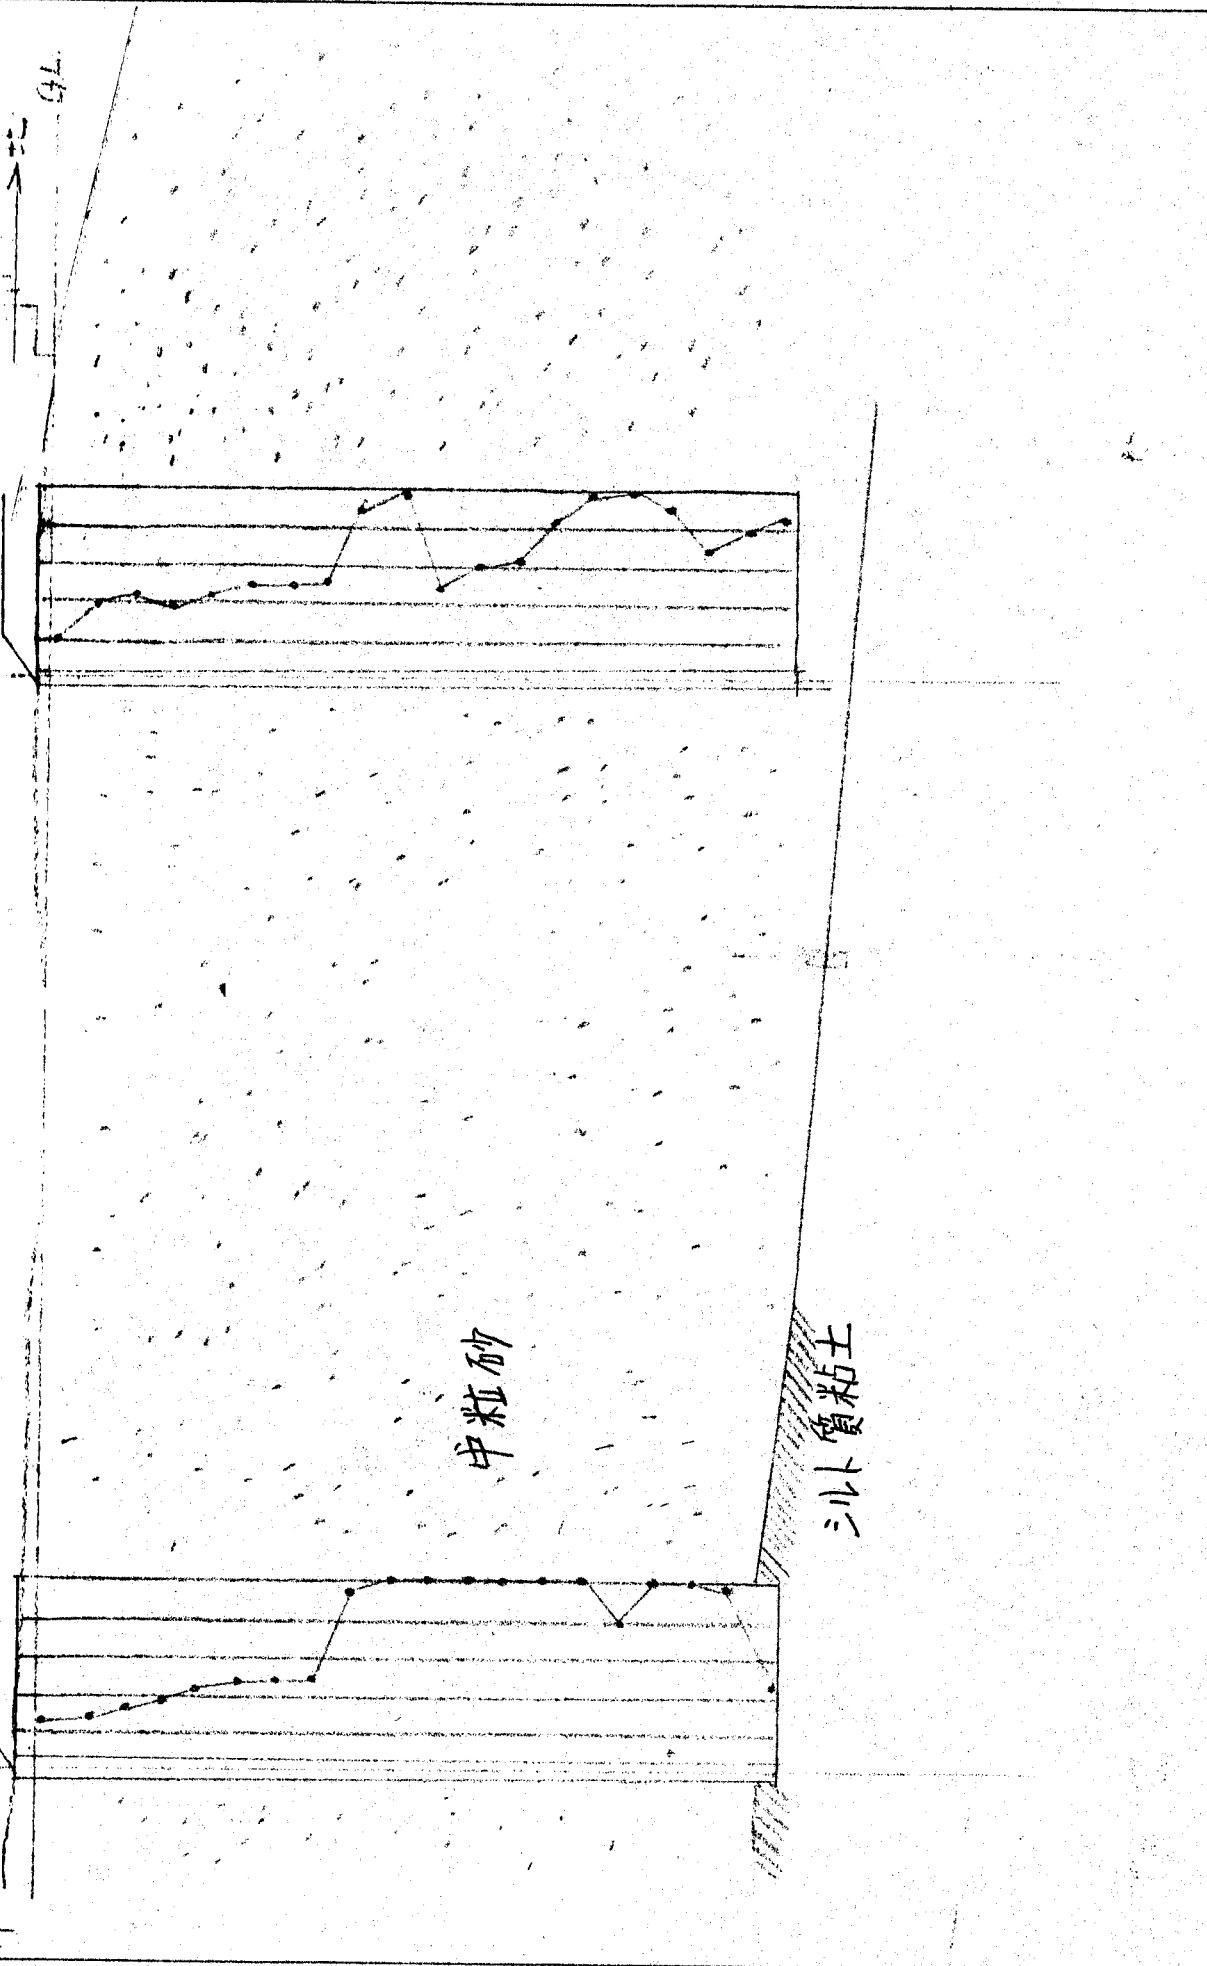

日新小学校校地地質調査地質柱状図 (No. 4)

調査地点 秋田市新屋栗田町
 調査年月日 昭和46年10月27日~11月13日

標高 GL+0.65
 孔内水位 GL-9.00

秋田市中通四丁目3番23号(旧会館内)
 太平ポーリング株式会社
 電話(2)8775番

標高 m	層厚 m	柱状 図	地質 名	色調	観察	相対 密度	相対 調度	標準貫入試験					採取 方法	
								深 度 m	N 値 回/cm	N値.				
								0	10	20	30	40	50	
10.65								0.60	12/30					レイモンドサンプラー使用
								0.90	15/30					
2	2.40		黄褐色 中粒砂					1.60	15/30					
					透水多い。 シルト質10% 程度含む			1.90	17/30					
3								2.60	17/30					
								2.90	19/30					
4								3.60	19/30					
								3.90	21/30					
5	5.00		暗青灰色 中粒砂					4.60	21/30					
								4.90	24/30					
6								5.60	24/30					
								5.90	25/30					
7								6.60	25/30					
								6.90	26/30					
8								7.60	26/30					
								7.90	47/30					
9								8.60	47/30					
								8.90	50/30					
10								9.60	50/30					
								9.90	50/28					
11								10.60	50/28					
								10.90	50/21					
12								11.60	50/21					
								11.90	50/30					
13								12.60	50/30					
								12.90	50/26					
14								13.60	50/26					
								13.90	50/25					
15	15.00	10.00	暗褐色 中粒砂		硬く詰り			14.60	50/25					
								14.90	40/30					
16	16.20	1.20	暗青灰色 中粒砂		如くシルト混り			15.60	40/30					
								15.90	50/26					
17								16.60	50/26					
								16.90	50/24					
18	18.50	2.80	暗褐色 中粒砂					17.60	50/24					
								17.90	48/30					
19	19.50	1.00	暗青灰色 中粒砂		シルト10%程混り			18.60	48/30					
								18.90	21/30					
20	20.00	0.50	暗灰色		シルト質粘土 腐植物混入			19.60	21/30					
								19.90						

水位 GL-9.00

締り
た

下
分
り

調査地点 秋田市新屋栗田町
 調査年月日 昭和46年10月27日~11月13日

標高 +0.30
 孔内水位 GL-6.40

秋田市中通四丁目3番23号(消防会館内)
 太平ボーリング株式会社
 電話 (2) 8775番

標尺	標高	深	層厚	柱状図	色調	地質名	観察	相対密度	相対調度	標準貫入試験					試料採取方法			
										深度	N値	N値						
m	m	m	m							m	回/cm	0	10	20	30	40	50	
	0.30									0.60	10/30							
1		1.40	1.40		黄褐色	中粒砂	表土、雑物等の混入あり			0.70	13/30							
2										1.60	18/30							
3							シルト微少含有あり。			2.60	21/30							
4										2.70	21/30							
5										3.60	19/30							
6										3.70	19/30							
7										4.60	20/30							
8										4.70	20/30							
9										5.60	25/30							
10										5.70	25/30							
11		10.60	9.20		黄褐色	中粒砂				6.60	24/30							
12							水分あり			6.70	24/30							
13							シルト10%程度含有あり			7.60	27/30							
14										7.70	27/30							
15										8.60	45/30							
16										8.70	45/30							
17										9.60	48/30							
18										9.70	48/30							
19		18.70	8.10		暗青色	中粒砂				10.60	24/30							
20							粗砂20%程度混入			10.70	24/30							
21		20.00	1.30		暗青色	中粒砂				11.60	20/30							
22										11.70	20/30							
23										12.60	31/30							
24										12.70	31/30							
25										13.60	41/30							
26										13.70	41/30							
27										14.60	48/30							
28										14.70	48/30							
29										15.60	47/30							
30										15.70	47/30							
										16.60	46/30							
										16.70	46/30							
										17.60	35/30							
										17.70	35/30							
										18.60	37/30							
										18.70	37/30							
										19.60	42/30							
										19.70	42/30							

水位 GL-6.40

中位の
締り

中位の
締り

中位の
締り

